

E+PLC400

다목적의 정밀 PLC

... 최고의 PID 제어와 레코딩 성능을 가진

E+PLC⁴⁰⁰는 놀라울 정도로 쉽게 단일 모듈형 솔루션에 PID제어, 레코딩과 PLC를 통합 하였습니다. 프로그래밍과 작화가 통합된 단일의 산업 표준(IEC 61131-3) 플랫폼을 사용합니다. 이 혁신적인 기기는 엔지니어링 시간을 줄이면서 프로세스 용구에 맞도록 유연성을 제공 하도록 설계 되었습니다. 이 것은 운영 효율성, 더 나은 공정 성능과 쉬운 규정 준수를 제공하기 위해 풍부한 기능과 향상된 사용자환경입니다.

E+PLC⁴⁰⁰는 빠르게 엔지니어링 할 수 있도록 Eurotherm 고유의 제어와 레코딩 기능을 가진 평선블럭과 모든 PLC의 기능을 결합 하였습니다. 이것은 베이스 크기를 선택 할 수 있고, 현재 또는 미래의 요구에 대응하도록 확장이 가능 하며, 다양한 목적의 정밀 I/O를 제공 합니다.

E+PLC⁴⁰⁰은 사용의 용이성을 보장하는 IEC 61131-3의 언어들을 사용하에 친숙한 프로그래밍 환경을 제공하는 선도적인 CODESYS 플랫폼을 사용 합니다, 쉽고 유연한 작화가 최대 두개의 로컬 오퍼레이션 패널뿐 아니라 PC, 태블릿, 스마트폰 과 같은 모바일 기기에서 사용 할 수 있는 웹서버로 제공됩니다; PLC와 같은 환경에서 자동 태그 인식으로 빠르게 설정 할 수 있습니다.

- 쉽게 제어와 레코딩을 하는 오픈 PLC
 - 단일 프로그램 도구의 확장가능 한모듈형 솔루션
 - 표준 IEC 61131-3 프로그래밍
 - PLC, PID 제어, 레코딩과 작화를 제공하는 단일 CODESYS 통합개발환경
 - 빠른 엔지니어링을 위해 미리 검증 받은 평선블럭
- PLC에서 정밀 PID 제어
 - 정밀하고 안정적인 제어 성능
 - 공정 시간의 감소
 - 생산성 증가
 - 에너지 사용 최적화
 - 품질 향상
 - 스크랩/재작업 최소화
- PLC에서 보안 레코딩
 - 손쉽게 규정 준수
 - 프로세스 변수의 정밀 측정
 - 측정지점에서 안전한 데이터 레코딩
 - 완전하고 정확한 기록의 추적
- 작화를 통합한 PLC
 - CODESYS환경에 통합된 작화 프로그램
 - 최대 두개의 로컬 저작 패널을 통한 직관적인 프로세스 인터페이스
 - 스마트폰, PC, 태블릿에서 이동중 볼 수 있음



모듈형의 유연한
통합 솔루션

Eurotherm[®]
by **Schneider Electric**

귀하의 프로세스 퍼즐의 모든 조각에 확장성과 다양한 기능을 추가

정밀한 측정

정밀한 제어를 위해서는 측정값이 정밀해야 합니다. E+PLC400은 정확한 제어와 레코딩의 결합을 가능하게 하는 다양한 정밀 I/O를 선택할 수 있는 모듈형 제품입니다. 사용자 요구에 맞게 베이스를 선택하고 아날로그와 디지털 I/O, 릴레이출력과 지르코니아 입력등을 선택할 수 있습니다. 높은 성능의 I/O는 엄격한 제어 및 프로세스의 정확한 레코딩을 위한 정밀한 측정을 제공합니다.

중소 규모의 어플리케이션을 위한 다양한 솔루션

최고의 제어

E+PLC400은 뛰어난 성능을 자랑하는 유로썸 고유의 오토튜닝 PID 알고리즘을 포함한 50년 이상의 제어 지식의 통합되어 있습니다.


- 빠르게 설정값에 도달하여 공정시간을 단축
- 빠른 제어 응답으로 오버슈트와 언더슈트를 제거하여 에너지사용을 최적화
- 제어 오차를 줄이고, 안정적인 제어를 통해 품질을 향상
- 파라미터 입력만 필요한 사전 엔지니어링 평션 블록

비용 절약, 뛰어난 제어 성능 – 왜 타협해야 하지요?

쉬운 SP 프로그래밍

E+PLC400은 매우 유연하고 풍부한 기능의 SP 프로그램을 포함합니다. 빠르고 쉬운 레시피 설정과 효율적인 운영을 할 수 있도록 스프레드 시트 스타일의 포맷을 사용하여 여러개의 세그먼트를 가진 여러개의 프로그램을 사용할 수 있습니다.

처리 비용을 절감 할 수 있는 보장된 동작

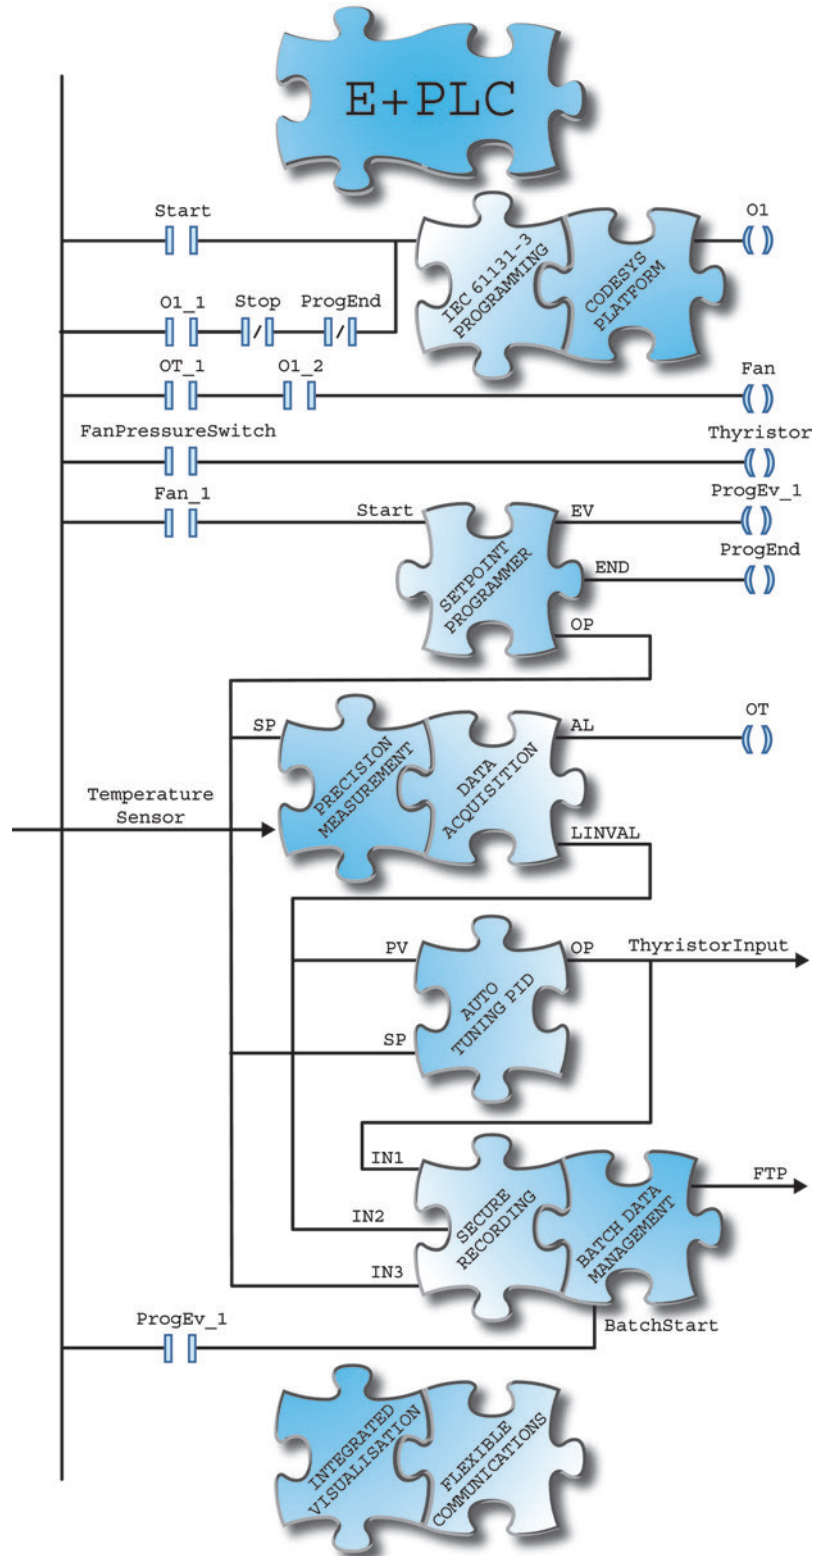

최고의 레코딩

E+PLC⁴⁰⁰는 데이터 전체의 무결성과 보안을 보장하기 위해 매우 효율적인 बै치 데이터 관리 전략과 레코딩 역량을 통합 하였습니다. 수십년간의 규제과 품질규정의 준수여부를 확인 하기위해 특별히 사용된 레코딩경험으로 어떠한 염려도 종식시켜 줍니다:

- 측정 시점에서의 지속적인 보안 기록
- 완벽한 데이터 무결성을 위한 전원 및 네트워크 장애에 대응 전략
- 모든 프로세스 데이터와 메타 데이터를 안전하게 함께 저장함으로 완전한 기록/배치 추적
- 로컬 USB, FTP서버와 Eurotherm 의혁신 적인 온라인 서비스 툴인 EOS 디렉터를 사용 하여 효율적인 데이터 보관 및 관리
- 자기 복구, 완전 검증된 데이터의 보관 전략
- 평선블록 형태로 파라미터 설정만으로 제공되는 보안 레코딩과 बै치 데이터 관리

완전히 안전한 프로세스 기록의 효율적 데이터 관리


엔지니어링 절감

E+PLC⁴⁰⁰은 친숙한 개발환경과 엔지니어링 비용을 절감 해주는 CODESYS 플랫폼을 사용 합니다. 단일 통합 개발환경으로 완전한 솔루션을 만들 수 있습니다. 첨단 Eurotherm PID 제어와 레코딩 능력을 담은 사용하기 쉬운 평선블록과 그래픽요소가 통합되어 설계되어 있습니다. E+PLC⁴⁰⁰은 빠른 엔지니어링과 다양한 어플리케이션을 가진 귀하의 프로세스에 완벽하고 고성능의 PLC 솔루션을 제공합니다.

개발기간을 줄일 수 있는 프로그래밍 도구는 다음과 같습니다:


- 사용하기 쉬운 평선블록의 다양한 기능
 - 오토튜닝PID제어
 - 보안 레코딩
 - SP 프로그래머
 - बै치 데이터 관리
 - 지르코니아 프로브 입력
- 포괄적인 PLC 평선블록 라이브러리 내장
- PLC, PID 제어, 레코딩과 작화를 포함한 완전한 프로세스 솔루션을 위한 단일, 통합 개발 환경

완벽하고 고성능의 PLC 솔루션 만들기
더 이상 쉬울 수 없습니다

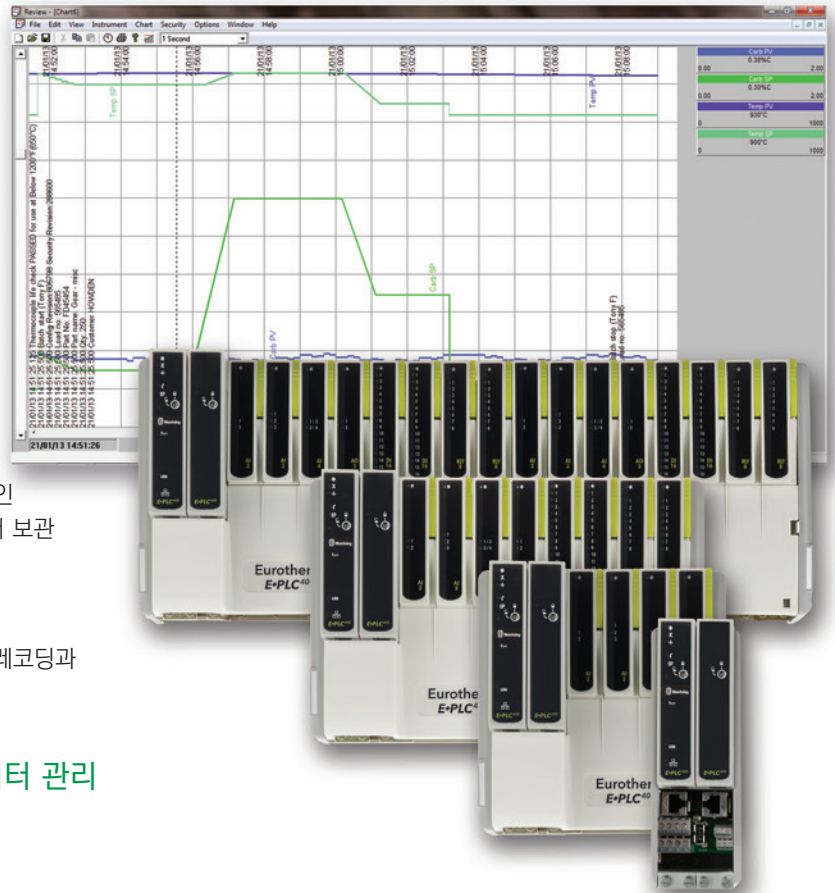

E+PLC⁴⁰⁰ 표준 IEC 61131-3 프로그램 언어 사용

Continuous Function Chart (CFC)
Function Block Diagram (FBD)
Instruction List (IL)
Ladder Diagram (LD)
Sequential Function Chart (SFC)
Structured Text (ST)
작화 내장

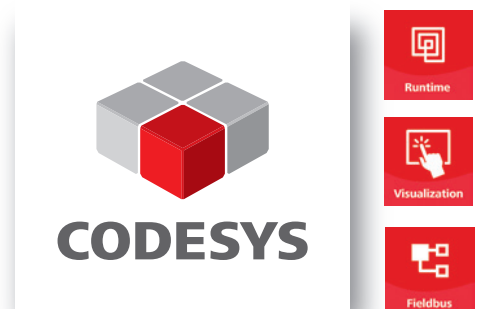

CODESYS® is a trademark of 3S-Smart Software Solutions GmbH.

쉬운 시스템 통합과 효율적인 프로세스 관리

E+PLC⁴⁰⁰은 내장 모드버스TCP 마스터/슬레이브, *EtherCAT 슬레이브 통신으로 상위 시스템에 쉽게 통합 할 수 있도록 설계되어 있습니다. 이로 슬레이브 기기로부터 데이터를 레코딩 하고 전력제어기나 다른 시스템 구성 요소들과 쉽게 결합할 수 있습니다.


E+PLC⁴⁰⁰의 강력한 네트워크는 복수의 FTP서버 및/또는 매우 효율적인 EOS 온라인 데이터 관리서비스에 안전한 보관 전략에 이용 됩니다. 이것은 귀하가 언제 어디서 어떤 웹 서버를 사용 하든 필요한 프로세스를 관리할 수 있는 기능을 제공 합니다.

EOS 디렉터:

- 장기간 히스토리 데이터의 안전한 오프사이트 저장
- 효과적인 관리, 검색 그리고 데이터 분석
- 귀하가 필요로 하는 때와 장소에서의 보안 접속

EOS 어드바이저:

- 교정 및 인증 데이터의 효과적 온라인 관리
- 플랜트의 가용성을 높이도록 설계

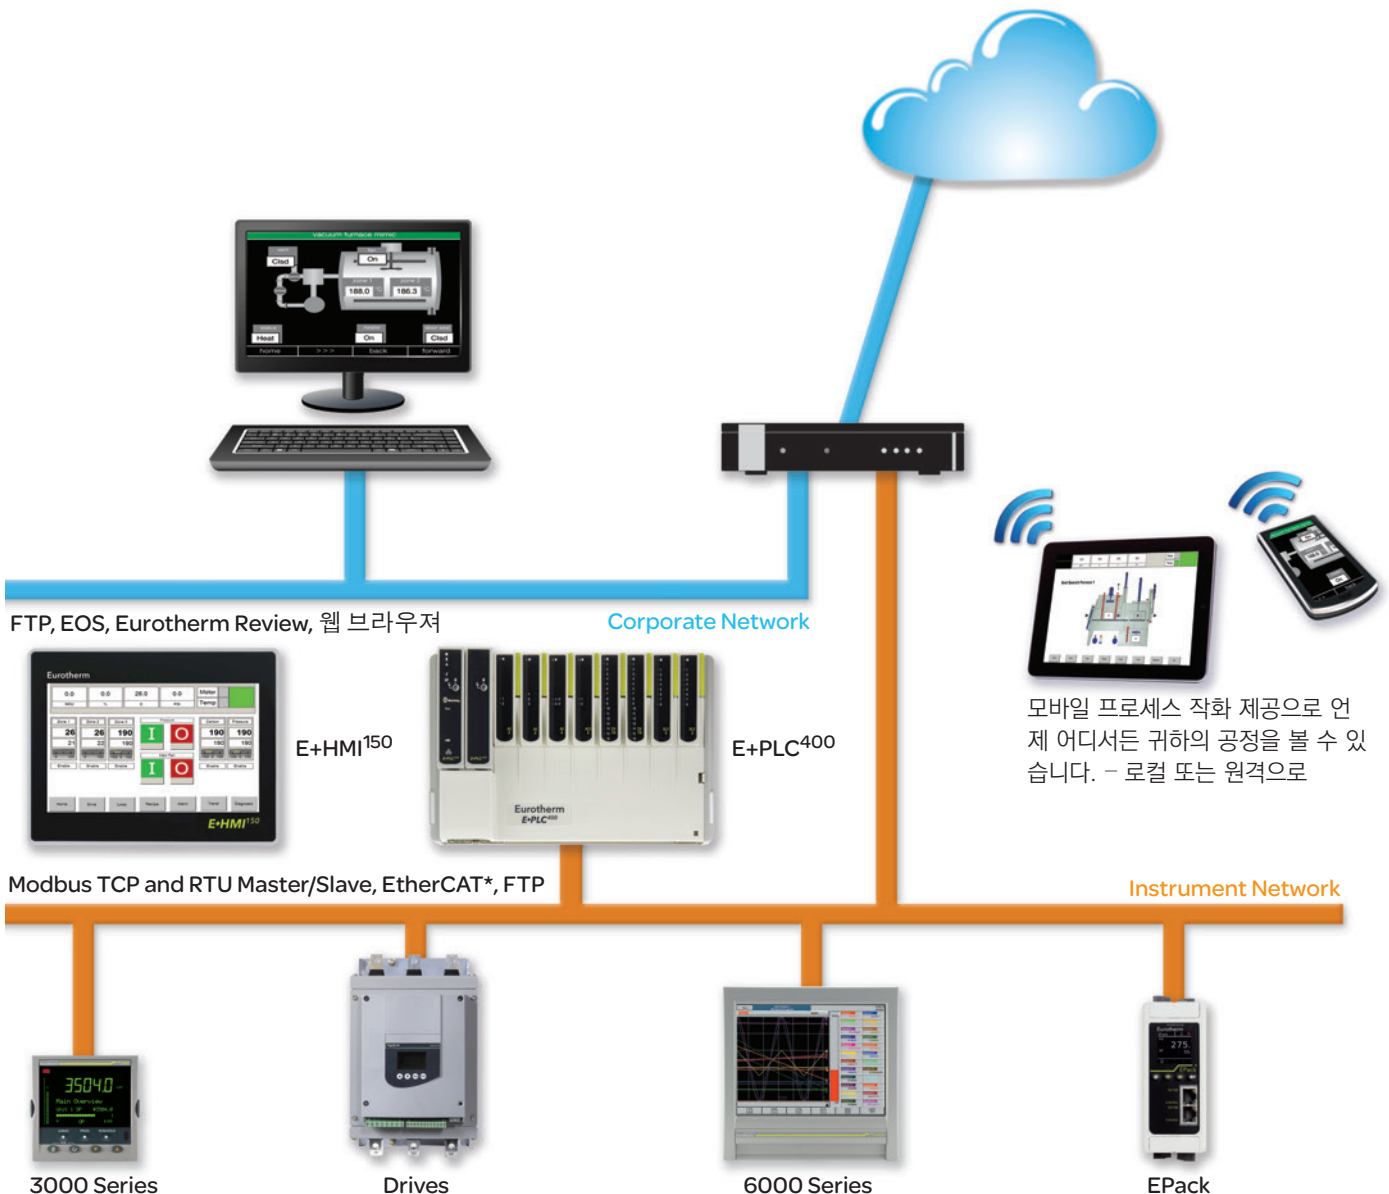

* 공장에 가능 여부를 확인 하세요

E+PLC⁴⁰⁰ Specification

Base Unit

General

The base unit is fitted with the E+PLC⁴⁰⁰ processor module plus additional I/O modules. These modules plug onto terminal units, which provide the wiring interface between the plant or machine and the I/O modules. Bases are available in 4 sizes to suit the number of modules required in a particular system.

Communication between the I/O modules and the processor is effected by the use of a passive internal module I/O bus running along the width of the base.

Each module position is tracked separately for additional security during live replacement of I/O modules.

The base consists of an aluminium extrusion, the internal I/O bus and mounting supports. It is designed to be DIN rail mounted or directly fixed to a bulkhead or mounting plate.

Mechanical

Based on the number of modules and allowing for future expansion, the E+PLC⁴⁰⁰ can be supplied in a range of standard base sizes to suit process requirements. The dimensions and weights of the different base sizes are detailed in the table below:

Module Capacity (Base Size)	0	4	8	16
Weight (no modules) kg	0.2	0.7	1.0	1.6
Weight (all modules) kg	0.7	1.65	3.1	5.3

Mounting:	DIN rail or Bulkhead, mounted vertically
DIN rail:	Use symmetrical DIN rail to EN50022 (35 x 7.5 or 35 x 15)
Casing:	Without additional protection IP20
Ventilation space:	25mm free space above and below

Controller General

Supply voltage range:	24V dc $\pm 20\%$
Power consumption:	< 82W maximum for fully loaded rack
Fuse rating:	0.5A time lag (Not customer replaceable)
Surge current:	8A maximum
Module power consumption:	See individual module specification

Environmental

Operating temperature:	0 to 55°C
Storage temperature:	-25°C to 85°C
Relative humidity:	5 to 95% (non-condensing)

Approvals and compliance

RoHS:	EU; China
GOST:	GOST CUTR
CCC:	Exempt
Packaging:	BS61131-2: 2007 section 6.3.3/6.3.4
Shock/Vibration:	To BS EN61131-2 : section 4.2.1 (5 to 150 Hz. at 1g; 0.5 octave per min.)
Altitude:	<2000 metres

RFI

EMC emissions:	BS EN61326 – 1: 2006 Class A
EMC immunity:	BS EN61326 – 1: 2006 Industrial Locations

Safety

	BS EN61010-1:2010
	Installation cat II, Pollution degree 2
	Safety earth and screen connections are made to earth terminals at the bottom of the base
	CE and cUL

Diagnostic LEDs

Diagnostic LEDs indicate module diagnostic status.

All modules:	A green LED at the top indicates the module is powered and operating correctly
Analogue modules:	Red LEDs for each channel to indicate channel failure
Digital modules:	Yellow LEDs for each channel to indicate the channel state

Processor Module

Processor and communications diagnostics are available from the LEDs on the front of the processor module. More advanced diagnostics are available remotely using the CODESYS function blocks.

Controller module:	A green LED at the top indicates the module is powered and operating correctly
Internal diagnostics:	A red LED indicates failure of the internal self diagnostic routines or an abnormal operating state.
Battery (if installed):	A green LED indicates battery health
Serial communications:	A yellow LED indicates communications activity
IP address:	A yellow LED indicates if the unit has resolved its IP address for Ethernet communications
Run:	A green LED indicates a program is loaded and running
USB link:	A green LED indicate USB activity, periodic flashing shows an error
USB over-current indication:	A yellow LED indicates an over current error
Ethernet link:	A yellow LED indicate Ethernet link and flashes to show activity
Ethernet Link speed:	A green LED indicates 100Mbps operation

Power on Self Tests: On power up the E+PLC⁴⁰⁰ automatically performs Power On Self Tests. These are a series of diagnostic tests used to assess the instrument health. The above LEDs indicate module diagnostic status in case of a problem.

Removable SD Memory Card

The storage of the processor firmware, and application is stored on a secure SDHC card this enables easy transfer from one processor to a replacement.

Physical

CPU:	Freescale Power QUICC II Pro processor MPC8313
Bus Size:	32 bit
System Clock:	333 MHz
Logging Capacity:	96MB on board, Log files transferred by FTP or USB
Removable SDHC Card Size:	32 Mbytes
USB:	USB 2.0 connected on terminal unit
Memory Resources	76MB Application/Visualisation files 106MB Data Recording 2MB Retain/Persistent
Control Switches:	Processor front panel
Push Button Switches:	Watchdog reset

Watchdog Relays

Each processor is fitted with a single watchdog relay.

Watchdog relay:	SPST, 1 per CPU, connected on the terminal unit
Contact rating (resistive):	24V ac/dc at 0.5A
Isolation:	30V ac rms or 60V dc

Communications

Ethernet

Supports 10/100baseT Ethernet:	Modbus-TCP Master or Slave, EtherCAT*
Connectors:	RJ45 connector
Network medium:	Ethernet Cat5 shielded cables
Speed:	10/100baseT auto-select
Line length (maximum):	100 metres, extendible by repeater
Allocation of IP address:	Fixed, DHCP
Modbus:	TCP configurable master or slave
Max numbers of slaves:	16 Modbus TCP slaves
Isolation:	50V dc; 30V ac (IEEE802.3)


RS422/485 Serial Communications

Connector:	RJ45 connector
Comms medium:	RS422 (5-wire) or RS485 (3-wire), jumper select
Line impedance:	120 Ω -240 Ω twisted pair
Line length:	1220m maximum at 9600 bits/sec
Max number of slaves:	16 Modbus RTU Slaves
Protocol:	Modbus RTU configurable master or slave

Note: Use of a communications buffer/isolator is recommended

Mechanical details

Base Size	A mm (inches)
0 module	61.25 (2.41)
4 module	162.75 (6.41)
8 module	274 (10.8)
16 module	477 (18.8)

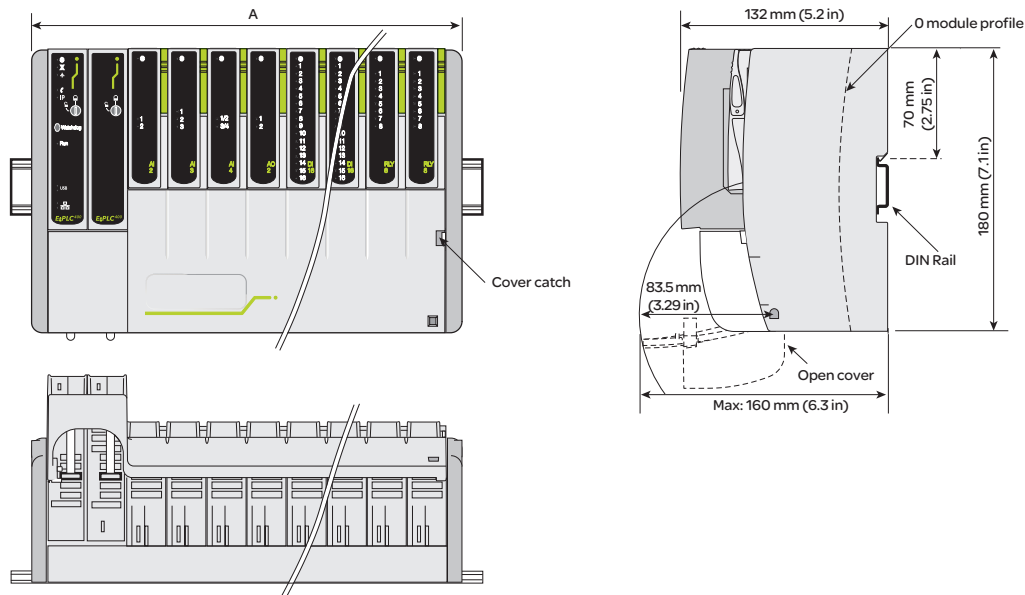

Input/Output Modules

Code	Description	Page
AI2-DC	Two Channel Analogue Input	7
AI2-TC	Two Channel Analogue Input	7
AI2-MA	Two Channel Analogue Input	8
AI3	Three Channel Analogue Input	8
AI4-TC	Four Channel Analogue Input	8
AI4-MA	Four Channel Analogue Input	9
AI4-MV	Four Channel Analogue Input	9
AI8-RT	Eight Channel Analogue Input*	9
AI8-TC	Eight Channel Analogue Input*	10
AI8-MA	Eight Channel Analogue Input	10
AI8-FMA	Eight Channel Analogue Input*	10
AO2	Two Channel Analogue Output	11
DI6	Six Channel Digital Input	11
DI16	Sixteen Channel Digital Input	12
DO16	Sixteen Channel Digital Output	12
RLY8	Eight Channel Relay Output	13
ZI	Zirconia Input*	13

T/C Type	Overall range (°C)	Standard	Max. linearisation error
B	0 to +1820	IEC584.1	0 to 400°C = 1.7°C 400 to 1820°C = 0.03°C
C	0 to +2300	Hoskins	0.12°C
D	0 to +2495	Hoskins	0.08°C
E	-270 to +1000	IEC584.1	0.03°C
G2	0 to + 2315	Hoskins	0.07°C
J	-210 to +1200	IEC584.1	0.02°C
K	-270 to +1372	IEC584.1	0.04°C
L	-200 to +900	DIN43710:1985 (to IPTS68)	0.02°C
N	-270 to +1300	IEC584.1	0.04°C
R	-50 to +1768	IEC584.1	0.04°C
S	-50 to +1768	IEC584.1	0.04°C
T	-270 to +400	IEC584.1	0.02°C
U	-200 to +600	DIN43710:1985	0.08°C
NiMo/NiCo	-50 to +1410	ASTM E1751-95	0.06°C
Platinel	0 to +1370	Engelhard	0.02°C
Mi/NiMo	0 to +1406	Ipsen	0.14°C
Pt20%Rh/Pt40%/Rh	0 to +1888	ASTM E1751-95	0.07°C

Table 1 Thermocouple types, ranges and accuracies

RTD Type	Overall range (°C)	Standard	Max. linearisation error
Cu10	-20 to +400	General Electric Co.	0.02°C
Cu53	-70 to +200	RC21-4-1966	0.01°C
JPT100	-220 to +630	JIS C1604:1989	0.01°C
Ni100	-60 to +250	DIN43760:1987	0.01°C
Ni120	-50 to +170	DIN43760:1987	0.01°C
Pt100	-200 to + 850	IEC751	0.01°C
Pt100A	-200 to +600	Eurotherm Recorders SA	0.09°C

Table 2 RTD type details

AI2-DC– Two Channel Analogue Input



This analogue input module is used to monitor analogue signals from a wide range of plant sensors. With the DC terminal unit it is optimised for mV, V, RTD or resistive sensors and Pot position sensing applications, for use with a Zirconia probe (often associated with a temperature measurement) for oxygen measurements.

Module type:	AI2-DC
No of channels:	2
Input types:	mV, V, RTD, Resistance, Potentiometer, Pyrometer
mV input range:	–150mV to +150mV
Initial accuracy:	Better than 0.1% of reading \pm 10 μ V
Resolution:	Better than 2 μ V
Voltage input range:	–10.3V to +10.3V
Initial accuracy:	Better than 0.1% of reading \pm 2mV
Resolution:	Better than 0.2mV
RTD/Ohms input range:	5 Ω to 640 Ω , supporting 2-, 3- or 4-wire sensor connection
Initial accuracy:	Better than 0.1% of reading \pm 0.1 Ω
Resolution:	Better than 0.02 Ω
RTD/HiOhms input range:	5 Ω to 6k Ω , supporting 2-, 3- or 4-wire sensor connection
Initial accuracy:	Better than 0.1% of reading \pm 0.5 Ω
Resolution:	Better than 0.2 Ω
Potentiometer input range:	0% to 100% rotation positioning of 100 Ω to 7k Ω linear pot
Initial accuracy:	Better than 0.1% of reading \pm 0.1%
Resolution:	Better than 0.001%
Power consumption:	2W maximum
System isolation:	300V RMS or dc (double insulation)
Channel isolation:	50V RMS or dc (basic insulation)
Common mode rejection:	>120dB (47-63Hz)
Series mode rejection:	>60dB (47-63Hz)

Input specification

RTD LIN Types:	See Table 2
----------------	-------------

Note: User calibration options can improve performance, limited only by noise and non-linearity.

AI2-TC – Two Channel Analogue Input



This analogue input module is used to monitor analogue signals from a wide range of plant sensors. With the TC terminal unit it is optimised for mV and thermocouple applications. It also supports a special high-impedance input on channel 2.

Module type:	AI2-TC
No of channels:	2
Input types:	TC, mV, Pyrometer, Zirconia probe
mV input range:	–150mV to +150mV
Initial accuracy:	Better than 0.1% of reading \pm 10 μ V
Resolution:	Better than 2 μ V
Zirconia probe input range:	0.0V to +1.8V
Initial accuracy:	Better than 0.1% of reading \pm 20 μ V
Resolution:	Better than 7 μ V
Power consumption:	2W maximum
System isolation:	300V RMS or dc (double insulation)
Channel isolation:	300V RMS or dc (basic insulation)
Common mode rejection:	>120dB (47Hz to 63Hz)
Series mode rejection:	>60dB (47Hz to 63Hz)

Input specification

TC Linearisation types:	See Table 1
CJC system:	Temperature measured by sensor under the TU input connector
Initial CJC accuracy:	\pm 0.5°C typical (\pm 1°C maximum)
CJC rejection:	Better than 30:1 over operating temperature range

The total worst-case TC error bound is the sum of the mV signal error, plus CJC error, plus linearisation table error terms.

Note: User calibration options can improve performance, limited only by noise and non-linearity.

AI2-MA – Two Channel Analogue Input



This analogue input module is used to monitor analogue signals from a wide range of plant sensors. With the DC-MA terminal unit it is optimised for 4-20mA current loop applications.

Module type:	AI2-MA
No of channels:	2
Input types:	mA
mA Input range:	–28mA to +28mA with 5Ω burden in the Terminal Unit
	Initial accuracy: Better than 0.25% of reading $\pm 2\mu\text{A}$
	Resolution: Better than 0.5uA
Power consumption:	2W maximum
System isolation:	300V RMS or dc (double insulation)
Channel isolation:	300V RMS or dc (basic insulation)
Common mode rejection:	>120dB (47-63Hz)
Series mode rejection:	>60dB (47-63Hz)

Note: User calibration options can improve performance, limited only by noise and non-linearity.

AI3 – Three Channel Analogue Input



This analogue input module is dedicated to current loop applications with modern transmitters. Each isolated channel includes a loop power supply for the transmitter (if needed). The power supply includes overload protection and automatic reset (when the fault is cleared).

Module type:	AI3
No of channels:	3
mA Input range:	–28mA to +28mA
	Initial accuracy: Better than 0.1% of reading $\pm 2\mu\text{A}$
	Resolution: Better than 0.5uA
Loop burden resistance:	60Ω nominal, 50mA maximum current
Channel PSU:	20-26V dc, current limit 30mA nominal, self-resetting
Power consumption:	Current input mode: <2W; with 3 powered loops: <3.3W
System isolation:	300V RMS or dc (double insulation)
Channel isolation:	50V RMS or dc (basic insulation)
Common mode rejection:	>120dB (47-63Hz)
Series mode rejection:	>60dB (47-63Hz)

Notes:

1. User calibration options can improve performance, limited only by noise and non-linearity.
2. Total burden can be increased to 250Ω by cutting a link track on the terminal unit.

AI4-TC – Four Channel Analogue Input



This analogue input module is used to monitor analogue signals from a wide range of plant sensors. With the TC terminal unit it is optimised for mV and thermocouple applications.

Module type:	AI4-TC
No of channels:	4
Input types:	TC, mV, Pyrometer
mV input range:	–150 to +150mV
	Initial accuracy: Better than 0.1% of reading $\pm 10\mu\text{V}$
	Resolution: Better than 2μV
Power consumption:	2W maximum
System isolation:	300V RMS or dc (double insulation)
Channel isolation:	300V RMS or dc (basic insulation), CH1+CH2 to CH3+CH4
Common mode rejection:	>120dB (47-63Hz)
Series mode rejection:	>60dB (47-63Hz)

Input specification


TC Linearisation types:	See Table 1
CJC system:	Temperature measured by sensor under the TU input connector
Initial CJC accuracy:	$\pm 0.5^\circ\text{C}$ typical ($\pm 1^\circ\text{C}$ maximum)
CJC rejection:	Better than 30:1 over operating temperature range

The total worst-case TC error bound is the sum of the mV signal error, plus CJC error, plus linearisation table error terms.

Notes:

1. User calibration options can improve performance, limited only by noise and non-linearity.
2. Wiring care and sensor choice should be used to prevent ground loops when using non-isolated thermocouples.

AI4-MA – Four Channel Analogue Input




This analogue input module is used to monitor analogue signals from a wide range of plant sensors. With the MA terminal unit it is optimised for 4-20mA current loop applications.

Module type:	AI4-MA
No of channels:	4
Input types:	mA
mA input range:	-28 to +28mA with 5Ω burden in the terminal unit
Initial accuracy:	Better than 0.25% of reading $\pm 2\mu\text{A}$
Resolution:	Better than 0.5uA
Power consumption:	2W maximum
System isolation:	300V RMS or dc (double insulation)
Channel isolation:	300V RMS or dc (basic insulation), CH1+CH2 to CH3+CH4
Common mode rejection:	>120dB (47-63Hz)
Series mode rejection:	>60dB (47-63Hz)

Notes:

1. User calibration options can improve performance, limited only by noise and non-linearity.
2. Wiring care and sensor choice should be used to prevent ground loops when using non-isolated thermocouples.

AI4-MV– Four Channel Analogue Input



This analogue input module is used to monitor analogue signals from a wide range of plant sensors.

Module type:	AI4-MV
No of channels:	4
Input types:	mV, Pyrometer, Zirconia Probe
mV input range:	-150mV to +150mV
Initial accuracy:	Better than 0.1% of reading $\pm 10\mu\text{V}$
Resolution:	Better than 2uV
Power consumption:	2W maximum
System isolation:	300V RMS or dc (double insulation)
Channel isolation:	300V RMS or dc (basic insulation), CH1+CH2 to CH3+CH4
Common mode rejection:	>120dB (47-63Hz)
Series mode rejection:	>60dB (47-63Hz)

Notes:

1. User calibration options can improve performance, limited only by noise and non-linearity.
2. Wiring care and sensor choice should be used to prevent ground loops when using non-isolated thermocouples.

AI8-RT – Eight Channel Analogue Input (consult factory for availability)



This analogue input module is used to monitor resistant thermometer signals from plant sensors. The RTD inputs each require the appropriate terminal unit.

Module type:	AI8-RT
No of channels:	8
Input types:	RTD
RTD support:	Support for 2 and 3-wire resistance thermometer devices
Ohms range:	20Ω to 500Ω and 2 and 3-wire lead compensation
Hi Ohms range:	200Ω to 5KΩ 2 and 3-wire-wire lead compensation
Resolution:	$\pm 10\text{m}\Omega$ and $\pm 100\text{m}\Omega$ (with 0.4s filter)
Linearity:	20ppm of span
System isolation:	300V RMS or dc (double insulation)
Channel isolation:	300V RMS or dc (basic insulation) Galvanic Isolated in pairs
Series mode rejection:	60dB (47-63Hz)
Common mode rejection:	120dB (47-63kHz) >120dB @50/60Hz
Power consumption:	1.8W maximum

Input specification

RTD LIN Types:	See Table 2
----------------	-------------

AI8-TC – Eight Channel Analogue Input (consult factory for availability)



This analogue input module is used to monitor analogue signals from a wide range of plant sensors. The mV and TC inputs each require the appropriate terminal unit.

Module type:	AI8-TC
No of channels:	8
Input types:	TC, mV
mV range:	–80mV to +80mV at input impedance >100KΩ
Resolution:	±10mΩ and ±100mΩ (with 0.4s filter)
Linearity:	20ppm of span
Power consumption:	1.8W maximum
System isolation:	300V RMS or dc (double insulation)
Channel isolation:	300V RMS or dc (basic insulation) Galvanic Isolated in pairs
Common mode rejection:	120dB (47-63kHz) >120dB @50/60Hz
Series mode rejection:	60dB (47-63Hz)

Input specification

TC Linearisation types:	See Table 1
CJC system:	Measured by 2 RTD (Pt100), located beneath the input connector
Initial CJC accuracy:	±0.8°C – sensed with two PT100 sensors on TU
CJC rejection:	Better than 30:1 over 0°C to +55°C ambient

AI8-MA – Eight Channel Analogue Input (consult factory for availability)



This analogue input module is used to monitor analogue signals from a wide range of plant sensors. The mA inputs require the appropriate terminal unit.

Module type:	AI8-MA
No of channels:	8
Input types:	mA
mA range:	–20mA to +20mA with 3.3Ω burden in the terminal unit
Resolution:	±10mΩ and ±100mΩ (with 0.4s filter)
Linearity:	20ppm of span
System isolation:	300V RMS or dc (double insulation)
Channel isolation:	300V RMS or dc (basic insulation) Galvanic Isolated in pairs
Series mode rejection:	60dB (47-63Hz)
Common mode rejection:	120dB (47-63kHz) >120dB @50/60Hz
Power consumption:	1.8W maximum

AI8-FMA – Eight Channel Analogue Input (consult factory for availability)



This analogue input module is used to monitor analogue signals from a wide range of plant sensors. The mA inputs each require the appropriate terminal unit.

Module type:	AI8-FMA
No of channels:	8
Input types:	mA
mA range:	–20mA to +20mA with 3.3Ω burden in the terminal unit
Resolution:	±10mΩ and ±100mΩ (with 0.4s filter)
Linearity:	20ppm of span
System isolation:	300V RMS or dc (double insulation)
Channel isolation:	300V RMS or dc (basic insulation) Galvanic Isolated in pairs
Series mode rejection:	60dB (47-63Hz)
Common mode rejection:	120dB (47-63kHz) >120dB @50/60Hz
Power consumption:	1.8W maximum

AO2 – Two Channel Analogue Output



This analogue output module provides two isolated analogue output channels. Each output can be independently configured for current or voltage.

Module type:	AO2
No of channels:	2
Current output:	–0.1 to 20.5mA; 10V dc max. Compliance with total burden less than 500Ω
Resolution:	Better than 1 part in 10,000 (1uA typical)
Voltage output:	–0.1V to 10.1V dc; 20mA max. compliance with total load greater than 550Ω
	–0.3 to 10.3V dc; 8mA max. compliance with total load greater than 1500Ω
Resolution:	Better than 1 part in 10,000 (0.5mV typical)
System isolation:	300V RMS or dc (double isolation)
Channel isolation:	300V RMS or dc (basic isolation)
Power consumption:	2.2W maximum
Calibration accuracy:	Better than 0.1% of reading

DI6 – Six Channel Digital Input




The six channel digital input module accepts AC voltage inputs and is available in two factory options optimized for 115V ac or 230V ac ranges.

Module type:	DI6-115, DI6-230
No of channels:	6
Input functions:	On/Off or de-bounce
Frequency:	47Hz-63Hz
Transient immunity:	EN50082
System isolation:	300V RMS or dc (double insulation)
Channel isolation:	300V RMS or dc (basic insulation)
Power consumption:	0.5W maximum


'115V ac' Variant

Active On state:	>95V ac rms, 150V ac rms maximum
Inactive OFF state:	<35V ac rms
Main input current:	More than 2mA required for 'ON'
Maximum input current:	8mA



'230V ac' Variant

Active ON state:	>180V ac rms, 264V ac rms maximum
Inactive OFF state:	<70V ac rms
Min input current:	More than 2mA required for 'ON'
Maximum input current:	9mA



Note:

Inadvertent Use of the Wrong Range

115V type on 230V ac No damage will result. Power dissipation will be higher than desirable for continued use on all 6 channels simultaneously.

THIS IS NOT A RECOMMENDED MODE OF OPERATION

DI16 – Sixteen Channel Digital Input



This digital input module accepts sixteen inputs and can be wired either for voltage input or for contact closure.

Module type:	DI16
No of channels:	16
System isolation:	300V RMS or dc (double insulation)
Channel isolation:	Channels share a common connection ('C')
Power consumption:	Logic: 0.75W maximum
	Contact: 2.0W maximum
Max. voltage across any channel:	30V dc

'Contact' Mode

Module Internal Isolated	
Power supply (P):	16 to 18V dc
Contact closure:	ON state: Input resistance threshold <1K Ω typical
	OFF state: Input resistance threshold >7K Ω typical
Wetting current:	>4mA
Wetting voltage:	>12V dc

'Logic' Mode

Logic inputs:	ON state: Input voltage threshold >10.8V dc, 30V maximum
	OFF state: Input voltage threshold <5.0V dc, -30V minimum
Input current:	3.8mA @ 12V dc; 2.8mA @ 24V dc

DO16 – Sixteen Channel Digital Output



This digital output module provides higher packing density and lower cost per channel. The sixteen digital output module provides sixteen short-circuit protected outputs, which are typically used for control, alarms, or event outputs.

Each channel can drive up to 0.7A and can be used for driving solenoids, relays, lamps, fans, thyristor units, single phase Solid State Relays (SSRs), or some three phase SSRs.

Module type:	DO16
No of channels:	16
Voltage supply (external):	24Vdc \pm 20%
Leakage current off state:	<10uA
Current output:	
Channel maximum:	0.7A/channel
Module Thermal Cut-off:	90 \pm 3 $^{\circ}$ C, restart: 88 \pm 3 $^{\circ}$ C
Short Circuit Protection:	0.7A to 1.7A per channel
Output voltage:	>Voltage supply (Vs) less 1V
System isolation:	300V RMS or dc (double insulation)
Channel isolation:	Channels share a common connection
Power consumption:	Module 0.6W maximum
Plant side:	850W maximum

RLY8 – Eight Channel Relay Output



This module provides eight relay outputs. These outputs may require external snubber circuits (application dependent).


Module type:	RLY8
No of channels:	8 normally open, AgCdO contacts for best operating life
Max current rating:	2A at up to 240V ac; 0.5A at 200V dc, increasing to 2A at 50V dc (resistive)
Min rating:	100mA at 12V
System isolation:	300V RMS or dc (double insulation)
Channel isolation:	300V RMS or dc (basic insulation)
Contact life:	>10 million operations @ 240V ac, 1A rms >600,000 operations @ 240V ac, 2A rms
Mechanical life:	>30 million operations
De-rating:	The above ratings summarise the performance with resistive loads. With complex loads further de-rating may be required
Power consumption:	2.5W

Relay De-rating

AC Voltage

As the AC load becomes more "difficult" a more significant de-rating factor is required. The graph below shows the derating to be applied in terms of contact life, assuming the load requirement is predefined.


Reduction factor for inductive ac loads

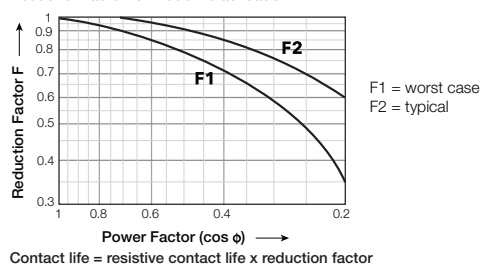

DC voltage

DC operation is also limited for difficult loads, particularly where there is significant inductance. Here the working current must be limited as shown where the load time constant (L/R, in ms) is the significant factor.

Max dc load breaking capacity

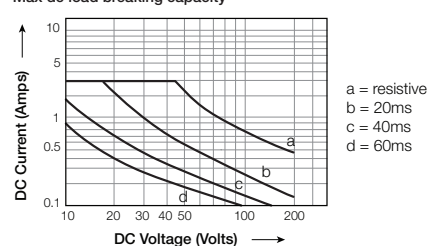

ZI – Zirconia Input (consult factory for availability)



Module type:	ZI
Input types:	Analogue voltage, Channel 1 – mV (TC), and Channel 2 – (2V Zirconia probe)

Thermocouple Input Specification (Ch1 ONLY)

Input range:	±150mV
Calibration accuracy:	±0.1% of electrical input, ±10μV
Noise:	5μV p-p with 1.6s Filter
Resolution:	<2μV with 1.6s Filter
Sensor break detect:	250nA break high, low or off
Input impedance:	10MΩ

Cold Junction Sensor Specification (Ch1 ONLY)

Temperature Range:	-10°C to +70°C
CJ rejection:	< 30:1
CJ accuracy:	± 1.3°C, ±0.5°C typ. ('Automatic' cold junction compensation)

Zirconia Input Specification (Ch2 ONLY)

Input range:	0mV to +1800mV
Calibration accuracy:	± 0.2% of electrical input
Noise:	0.1mV p-p with 1.6s Filter
Resolution:	<50μV with 1.6s Filter
Sensor impedance measurement:	0.1kΩ to 100kΩ ±2%
Input Impedance:	>500MΩ
Input leakage current:	±4.0nA max, ±1nA typical

General Specifications

Power consumption:	1.8W maximum
Common mode rejection:	>80db, 48 - 62Hz
Series mode rejection:	>60db, 48 - 62Hz
System isolation:	300V RMS or dc (double insulation)
Channel isolation:	300V RMS or dc (basic insulation)

E+HMI¹⁵⁰ Remote Operator Panel



The E+HMI¹⁵⁰ provides an exceptionally rich and easy operator interface onto the E+PLC product range. It is designed for use in demanding applications and has state-of-the-art features combined into an elegantly designed interface solution.

Powerful engineering and graphic design tools ensure advanced configurations can be quickly and easily created to give the best interface for any specific process.

The panel offers remote monitoring and control of the process with client-server functionality.

E+HMI¹⁵⁰ Specification

Display

	07	13
Type:	TFT	TFT
Resolution:	800 x 480, WVGA	1280 x 800, WXGA
Active display area:	7" diagonal	13" diagonal
Colors:	64K	64K
Backlight:	LED	LED
Brightness:	300 Cd/m ² typical	300 Cd/m ² typical

System Resources

Operating System:	Microsoft Windows CE 6.0
User memory:	07: 128 MB Flash
	13: 256 MB Flash
RAM:	256MB DDR

Operator Interface

Touchscreen:	Analogue resistive
LED indicators:	1 (dual color)

Interface

Ethernet:	2 10/100 Mbit with integrated switch
USB:	2 Host Interface (1 version 2.0, 1 version 2.0 and 1.1)

Ratings

Power supply voltage:	24V dc (10 to 32V dc)
Current consumption:	0.65A at 24V dc (max.)
Fuse:	Automatic
Weight Approx:	07: 1.0Kg
Weight Approx:	13: 2.8Kg
Battery:	Rechargeable Lithium battery, not user-replaceable

Environmental Conditions

Operating temperature:	0 to 50°C (vertical installation)
Storage temperature:	-20 to +70°C
Operating and storage humidity:	5 – 85% relative humidity, non-condensing
Protection class:	Front: IP66
	Rear: IP20

Dimensions

Faceplate W x H:	07: 187mm (7.36") x 147mm (5.79")
	13: 336mm (13.22") x 267mm (10.51")
Cutout:	07: 176mm (6.93") x 136mm (5.35")
	13: 326mm (12.83") x 256mm (10.07")
Depth D (T):	07: 47 + 4 mm (1.85 + 0.16")
	13: 56 + 4 mm (2.20 + 0.16")


Approvals

CE:	Emission EN61000-6-4 Immunity EN61000-6-2 for installation in industrial environments
CUL:	UL508 Listed E190581 Class1 Div2 Groups A, B, C, D E465957


Mechanical details



Connectors



Connectors

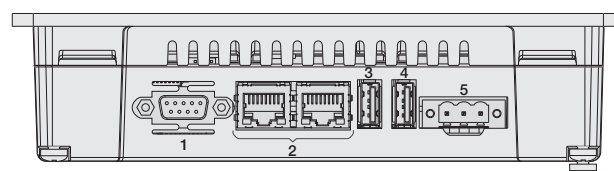

Pos.	Connector	Description
1	Serial Port	RS-232, RS-485, RS0422 software configurable
2	Ethernet Port	2 x 10/100 Mbit with integrated switch
3	USB Port	Version 2.0-1.1
4	USB Port	Version 2.0 high speed only
5	Power Supply	24V dc (10-32V dc)

E+PLC⁴⁰⁰ Order codes

EPLC400	1	2	3	4	5	6	7	8	9	10	11	12	13
14	15	16	17	18	19	20	21	22	23	24	25	26	27
28	29	30	31	32	33	34	35	36	37	38	39	40	

Basic Product		19 Reserved		31 Future		37 Future	
EPLC400	Precision PLC	XXXXXX	Future	XXXXXX	Future "Phase 2" advanced order	XXXXXX	Future
1 Base Size		20-30 Features		32 Future		38 Labels	
00	0 Way base (0 I/O slots)	NONE	No features required	XXXXXX	Future	XXXXXX	No custom labels (Eurotherm)
04	4 Way base (4 I/O slots)	WVIS	Webserver visualisation*			Fnnnn	Custom label
08	8 Way base (8 I/O slots)	PROG	Setpoint prorammer				
16	16 Way base (16 I/O slots)	BATCH	Batch and recording				
		VAC	Vacuum furnace package				
		HT	Heat Treatment atmosphere control package (zirconia, carbon diffusion, 3 gas IR)				
2 Battery Required				33-35 Communications Option		39 Special	
BATT	Battery fitted (default)			NONE	Modbus TCP	XXXXXX	Default
NOBATT	Battery not fitted				Master/Slave, RTU or TCP, EtherNet/IP (default)		
3-18 Slot 1-16				36 Future		40 USB Memory Stick	
BLANK		Blank terminal unit		XXXXXX	Future	NONE	Not required
NONE		No I/O module fitted (default)				008G	8GB USB memory stick
AI2-DC		2 ch – analogue input module					
AI2-TC		2 ch – isolated TC input module with CJC					
AI2-MA		2 ch – isolated analogue input module with 5Ω shunt fitted for mA inputs					
AI3		3 ch – isolated 4-20mA analogue input module with 24V Tx PSU					
AI4-TC		4 ch – isolated in pairs, TC, with CJC					
AI4-MA		4 ch – isolated in pairs, mA input module					
AI4-MV		4 ch – isolated in pairs, mV input module					
AI8-RT		4 ch – isolated RTD input module*					
AI8-TC		8 ch TC with CJC (isolated in pairs)*					
AI8-MA		8 ch mA input module (isolated in pairs)*					
AI8-FMA		Fast 8 channel isolated mA input module 20ms*					
AO2		2 ch – isolated DC (V or mA) output module					
DI6-230V		6 ch high voltage Logic (230V ac) input module					
DI6-115V		6 ch high voltage Logic (115V ac) input module					
DI16		16 ch digital input module					
DO16		16 ch digital output module					
RLY8		8 ch – Relay output module					
ZI		Zirconia Input Module					

* Contact factory for availability

E+HMI¹⁵⁰ Order Code

EHMI	1	2
------	---	---

Basic Product		2 Display Size	
EHMI	Remote Operator Panel	07	7" TFT-LCD operator panel
		13	13" TFT-LCD operator panel
1 Type			
150	Remote visualisation for CODESYS V3 E+PLC		

(주) 한국 유로써

서울특별시 금천구 가산디지털 1로,
186 제이플라츠 13층

Phone: +44 (01903) 268500

Fax: +44 (01903) 265982

www.eurotherm.com/worldwide



Scan for
local contacts

Eurotherm by Schneider Electric, the Eurotherm logo, Chessell, EurothermSuite, Mini8, Eyon, Eyris, EPower, EPack, nanodac, piccolo, versadac, optivis, Foxboro and Wonderware are trademarks of Schneider Electric, its subsidiaries and affiliates. All other brands may be trademarks of their respective owners.

All rights are strictly reserved. No part of this document may be reproduced, modified, or transmitted in any form by any means, nor may it be stored in a retrieval system other than for the purpose to act as an aid in operating the equipment to which the document relates, without the prior written permission of Eurotherm Limited.

Eurotherm Limited pursues a policy of continuous development and product improvement. The specifications in this document may therefore be changed without notice. The information in this document is given in good faith, but is intended for guidance only.

Eurotherm Limited will accept no responsibility for any losses arising from errors in this document.

